



Dickey Manufacturing Company

Assure Tight 35

Assure Tight Seals are versatile, easy to use, and are a fully adjustable plastic seal. The thin, smooth tail can fit through small openings. The seals can be locked at any length, unlike beaded tail seals. The tail is secured with metal locking mechanism for an assured secure seal.



FEATURES

- ↗ Corrosion proof
- ↗ Enclosed metal locking mechanism
- ↗ Multi-locking positions
- ↗ No sealing tools needed
- ↗ Ultraviolet inhibitors and antioxidants added to extend life
- ↗ Stock seals available for rush shipments
- ↗ Stock seals are marked sequential numbering
- ↗ Recyclable
- ↗ Stock item available in red, blue, green, & yellow.
- ↗ 13 3/4" overall length

APPLICATIONS

- ↗ Cabinets
- ↗ Cash & Coin bags
- ↗ Containers
- ↗ Fiber drums
- ↗ Truck & Railcar doors
- ↗ Liquid bulk trailers
- ↗ Liquor carts
- ↗ Transfer hoppers

PACKAGING

- ↗ 1000 Seals per case
- ↗ Weight per 1000: 16 lbs


SPECIFICATIONS

- ↗ Materials: Polypropylene
- ↗ Operational length: variable
- ↗ Minimum required slot size: ~.2"
- ↗ Average breaking strength: 95 lbs
- ↗ Numbering: to 7 digits
- ↗ Lettered SECURED
- ↗ Stock colors available: Yellow, red, and blue

LOCKING INSTRUCTIONS

- ↗ Pass narrow end of seal through the openings of the item to be sealed
- ↗ Insert and push the end of the seal into and through the locking barrel
- ↗ Pull remainder of the seal through until the seal fits tightly on the item that you are sealing
- ↗ Gently tug on the seal to ensure the locking mechanism are properly seated
- ↗ Record seal number as required



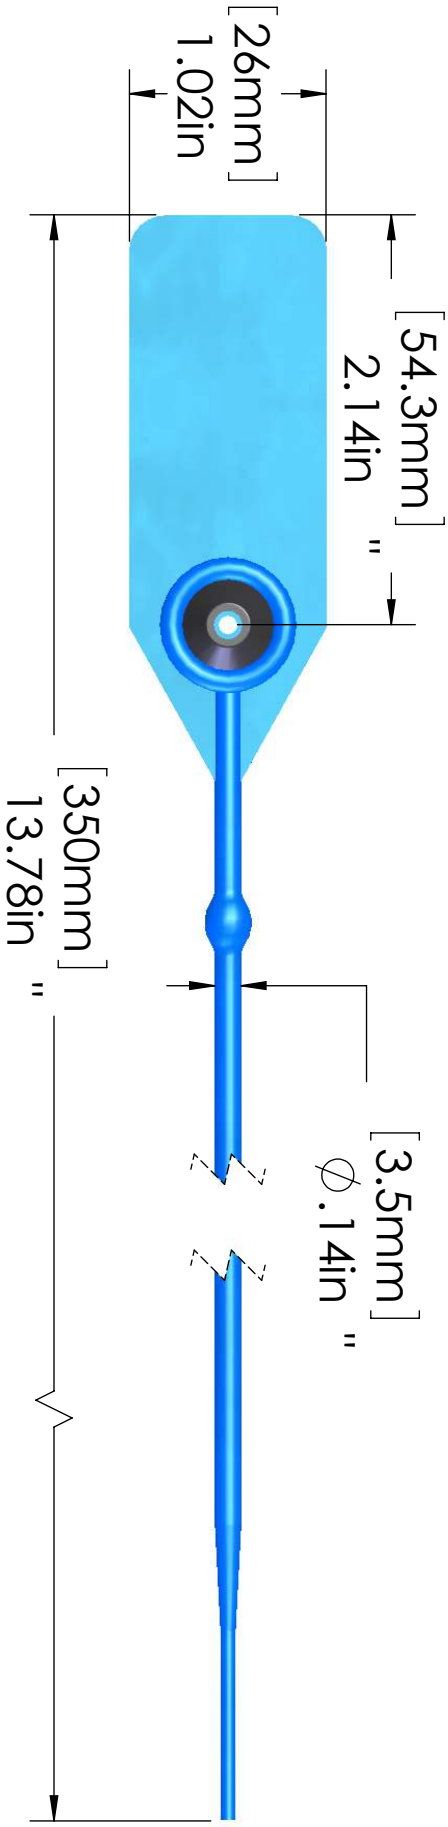

UNLESS OTHERWISE SPECIFIED		THIS DRAWING AND THE INFORMATION ON IT ARE THE PROPERTY OF DICKIE MANUFACTURING COMPANY AND IS NOT TO BE USED OR DUPLICATED WITHOUT PRIOR AUTHORIZATION	
DETAILS		TOLERANCES	
FRACTIONAL		FRACTIONAL	
XXX .005		±.02	
XXX .001		ANGULAR	
XXX ±.005		±.30°	
BREAK ALL EDGES .0145"		ALL HOLES CHAMFERED .0145"	
SURFACE FINISHNESS		125 μIN BEFORE PLATING	
THIRD ANGLE PROJECTION			

DMC		DICKIE MANUFACTURING COMPANY	
1315 E. MAIN STREET ST. CHARLES, IL 60174		PHONE: (630) 584-2918 FAX: (630) 584-0261	
PP Copolymer		TITLE	
TREATMENT		Assure Tight 35	
DATE		PLOT	
DRAWN 4/15/2014		SCALE 1:1	
DICKIE MANUFACTURING NO.		DWG NO.	
502900		7985	
SHEET		1 OF 1	